

# TRD 8001 Coriolis Remote Display

## Features:

- > Remote Display
- > For use with TCE 6000
- > For use with Multiple Sensors

## Benefits:

- > Can be mounted up to 1,000 m/3,280 feet away from meter
- > Easy Installation
- > User-friendly setup procedures

## Specifications:


Display:	back-lit LCD screen, 132 x 32 dot
Supply Voltage:	via interface
Programming:	via front keyboard
Interface to TCE:	RS485
EMC:	according to EN 61000-6-4 and 61000-6-2
Electrical Connections:	connectors M12, B coded
Housing Material:	ABS-FR (plastic, flame retardant)
Protection Class:	IP64
Weight:	0.4 kg/0.88 lb
Wall Mount:	hidden screws



## Temperature:

Ambient:	32 °F ... +140 °F (0 °C ... +60 °C)
Storage and Transport:	-4 °F ... +176 °F (-20 °C ... +80 °C)

## Meter Dimensions:

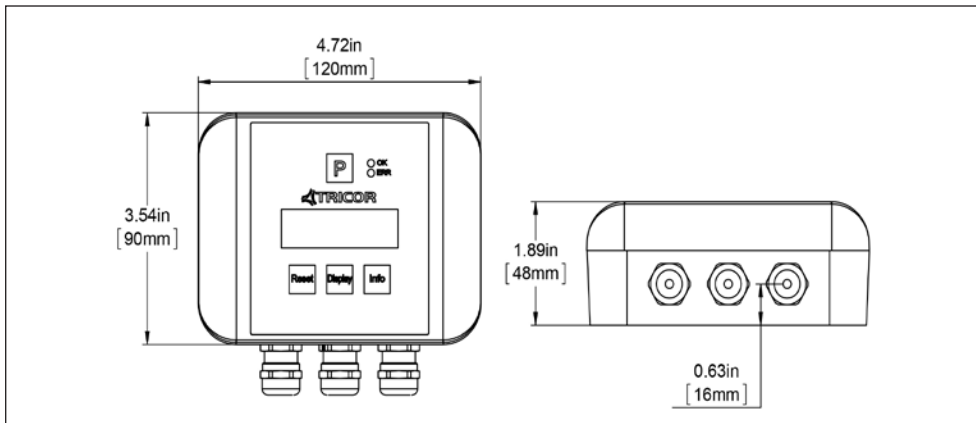

## Ex Certification:

ATEX (Exn)	Zone 2: II 3G Ex nA IIC T2...T4 Gc
------------	------------------------------------

Original KEM/AWL document: TRD\_8001\_F\_EN\_170110 | Copyright KEM/AWL, Subject to change without notice



[www.tricorflow.com](http://www.tricorflow.com)

N & S AMERICA: AW-Lake Company  
2440 W. Corporate Preserve Dr. #600, Oak Creek WI 53154, USA, Tel.: +1 414 574 4300

SINGAPORE: TASI Flow Souteast Asia, Representative Office (RO) Singapore  
1003 Bukit Merah Central #06-32, Singapore 159836, UEN: T15RF0080G, P: +65 6274 1130

CHINA: TASI Flow China  
Rm. 2429, JinYuan Office Building, No. 36, CN- BeiYuan Road, Beijing 100012, P.R. CHINA, Tel.:+86 10 520 037 38

Rest of the World: KEM Küppers Elektromechanik GmbH, Liebigstraße 5, 85757 Karlsfeld, Germany, Tel.:+49 8131 59391-0