



FEATURES

- Robust, no moving parts for long life
- Custom flow connectors & installation lengths
- Excellent repeatability (± 0.05 % of flow rate)
- Optional Net Oil functionality

BENEFITS

- ▶ Increased productivity, less maintenance
- ▶ Lower installation cost
- ▶ Increased product quality
- ▶ Simpler whole solution for Net Oil without PLC/RTU

FLOW RATE

Mass Flow Rate (max.):	65,000 kg/h [2,388 lb/min]
Volumetric Flow Rate (max.):	65,000 l/h [286.2 gpm, 9,812 bbl/d (US)]
Nominal Meter Size:	DN50 [2"]

PRESSURE RATING	100 bar [1,450 psi]
------------------------	---------------------

ACCURACY (LIQUIDS)¹⁾

Basic Accuracy (Mass Flow) ²⁾ :	± 0.3 % (option: ± 0.1 %) of flow rate
Repeatability (Mass Flow):	± 0.05 % of flow rate
Basic Accuracy (Volume Flow) ²⁾ :	± 0.4 % (option: ± 0.15 %) of flow rate
Repeatability (Volume Flow):	± 0.05 % of flow rate
Zero Stability:	± 0.01 % of full scale

ACCURACY (GASES)

Basic Accuracy (Mass Flow) ²⁾ :	± 1 % (option: ± 0.5 %) of flow rate
Repeatability (Mass Flow):	± 0.25 % of flow rate

DENSITY

Density Range:	up to 2,500 kg/m ³ [2.5 g/cm ³]
Density Accuracy ²⁾ :	± 5.0 kg/m ³ (option: ± 1.0 kg/m ³) [± 0.005 g/cm ³ (option: ± 0.001 g/cm ³)]
Density Repeatability:	± 0.5 kg/m ³ [± 0.0005 g/cm ³]

TEMPERATURE

Process Temperature Range:	-40 °C ... +100 °C [-40 °F ... +212 °F] Option: -60 °C ... +200 °C [-76 °F ... +392 °F]
Temperature Accuracy:	± 1 °C ± 0.5 % of reading [± 1.8 °F ± 0.5 % of reading]
Temperature Repeatability:	± 0.2 °C [± 0.36 °F]


MATERIALS (WETTED PARTS)

Tubes:	1.4404 [AISI 316L]
Case:	1.4404 [AISI 316L]
Flow Splitter:	CF3M [AISI 316L]

Option:	
Brazing Alloy:	BNi-2
Fully Welded:	1.4404 [AISI 316L]


¹⁾ Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.

²⁾ Calibration certificate options for higher accuracy are available.

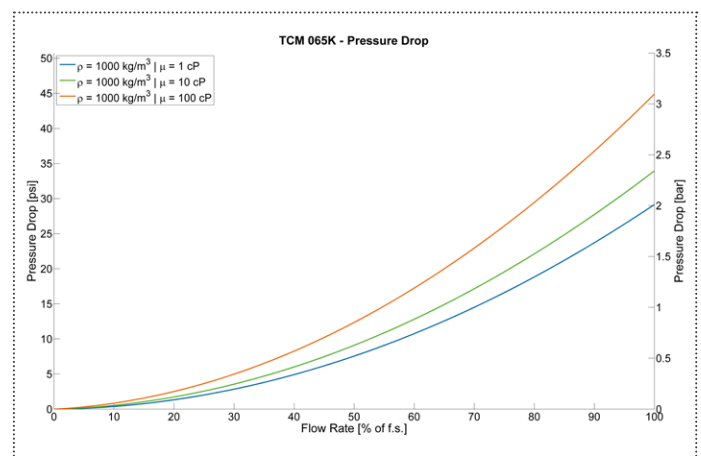



CLASSIC Series | TCM 065K Coriolis Mass Flow Meter

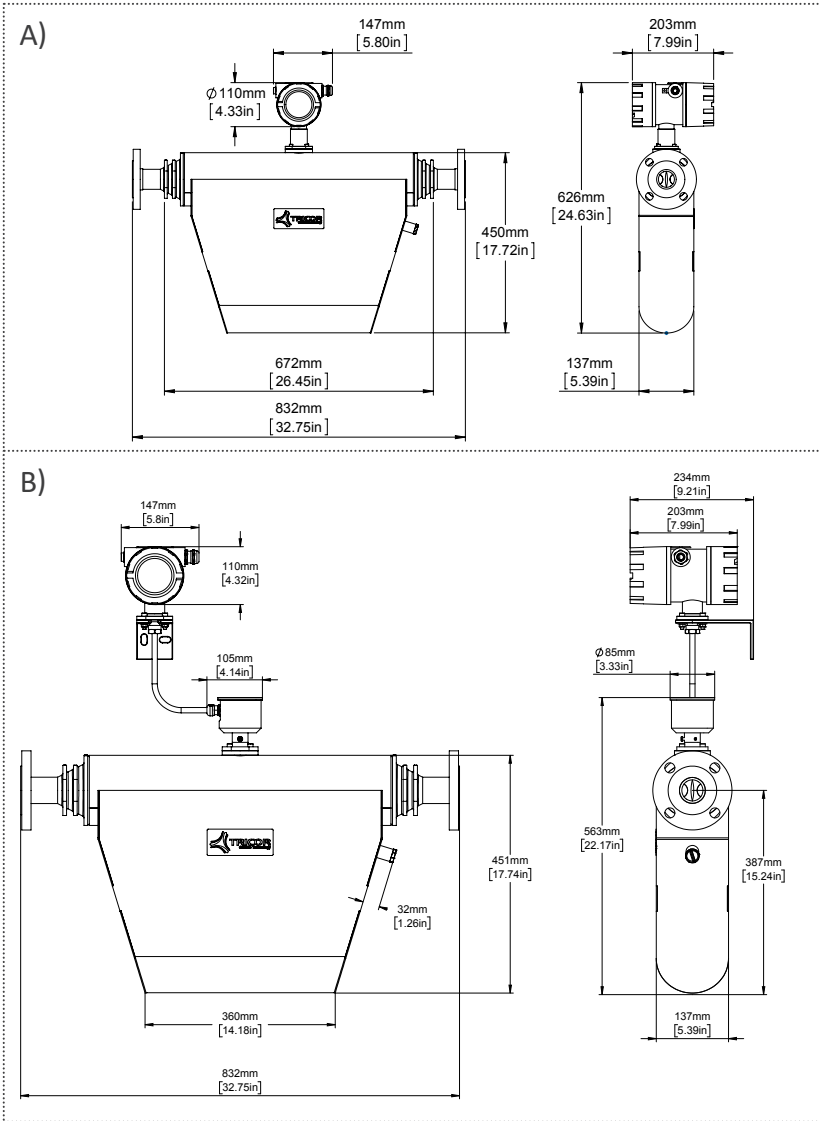

METER DIMENSIONS³⁾ AND WEIGHTS

A) Compact Version

Weight: 35.2 kg [77.6 lb]

With meter mount in aluminum diecast housing

B) Remote Version

Weight: 36.5 kg [80.5 lb]

With junction box and remote field mount


Standard Process Connection

DN50 PN40 [2" ANSI CL 300] (others on request)

EX-CERTIFICATIONS

ATEX (Ex)	Zone 1: Group IIC or IIB, T2...T4
ATEX (Exn)	Zone 2: II 3G Ex nA IIC T2...T4 Gc
IECEX (Ex)	Zone 1: Group IIC or IIB, T2...T4
cCSAus (Ex1) ⁶⁾	Class 1, Division 1: Group A, B, C, D or C, D, T2...T4
ATEX + IECEx + cCSAus triple approval (Ex3) ^{6) 7)}	Zone 1: Group IIC or IIB, T2...T4 Class 1, Division 1: Group A, B, C, D or C, D, T2...T4
EAC (TR-CU) ⁶⁾	Group IIC or IIB, T2 ... T4

PANEL MOUNT⁴⁾

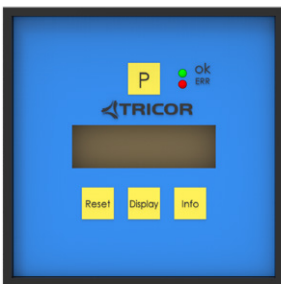

REMOTE MOUNT⁵⁾



ELECTRONICS

Power Supply: 24 V DC \pm 20 % or 90 ... 264 V AC
 Outputs: Analog, Frequency, Pulse, Status
 Interfaces: RS485 RTU (Modbus), HART[®]
 Cable Gland: M20 | 1/2" NPT

³⁾ Drawing of the Meter Dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

⁴⁾ Weight: 0.4 kg [0.88 lb].

⁵⁾ Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable, Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].

⁶⁾ For Ex1, Ex3, EAC (TR-CU) the electronic is only available in aluminum housing.

⁷⁾ Only with remote electronics.

www.tricorflow.com



N & S AMERICA
 AW-Lake Company
 2440 W. Corporate Preserve Dr. #600
 Oak Creek WI 53154 | USA
 +1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
 KEM Instruments SEA Pte. Ltd.
 UEN: 201717792Z
 1003 Bukit Merah Central #06-32
 Singapore 159836
 +65 6274 1130

CHINA
 KEM flow technology (Beijing) Co., Ltd.
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15
 HongJunYingNan Road
 Chaoyang District, Beijing 100012 | China
 +86 10 84929567

REST OF WORLD
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-100