



CORIOLIS MASS FLOW AND DENSITY METER FOR MARINE FUEL CONSUMPTION MANAGEMENT

- Customized installation length
- Direct mass flow measurement
- Real time density measurement for fuel quality control
- Maintenance free
- No moving parts
- Replaces all kind of volume based flow meters
- Excellent repeatability in order to determine actions for process/engine optimization
- Recommended 5 year meter recalibration

ACCURACY¹⁾

Basic Accuracy (Mass Flow) ²⁾ :	±0.3 % (option: up to ±0.1 %) of flow rate
Repeatability (Mass Flow):	±0.05 % of flow rate
Basic Accuracy (Volume Flow) ²⁾ :	±0.3 % (option: up to ±0.15 %) of flow rate
Repeatability (Volume Flow):	±0.05 % of flow rate
Zero Stability:	±0.01 % of full scale

DENSITY

Density Range:	up to 2,500 kg/m ³ [2.5 g/cm ³]
Density Accuracy ²⁾ :	±1.0 kg/m ³ [±0.001 g/cm ³]
Density Repeatability:	±0.5 kg/m ³ [±0.0005 g/cm ³]

TEMPERATURE

Process Temperature Range:	-40 °C ... +100 °C [-40 °F ... +212 °F] Option: -60 °C ... +200 °C [-76 °F ... +392 °F]
Temperature Accuracy:	±1 °C ±0.5 % of reading [±1.8 °F ±0.5 % of reading]
Temperature Repeatability:	±0.2 °C [±0.36 °F]

MATERIALS (WETTED PARTS)

Tubes:	1.4404 [AISI 316L]
Case:	1.4404 [AISI 316L]
Flow Splitter:	1.4404 [AISI 316L]
Brazing Alloy:	BNi-2

TYPICAL SPECIFICATION:


Nominal Meter Size:	G½" thread
---------------------	------------



¹⁾ Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.
²⁾ The specifications refer to standard conditions (for further information see TCM CLASSIC series manual).



CLASSIC Series | TCM 0650 Coriolis Mass Flow Meter

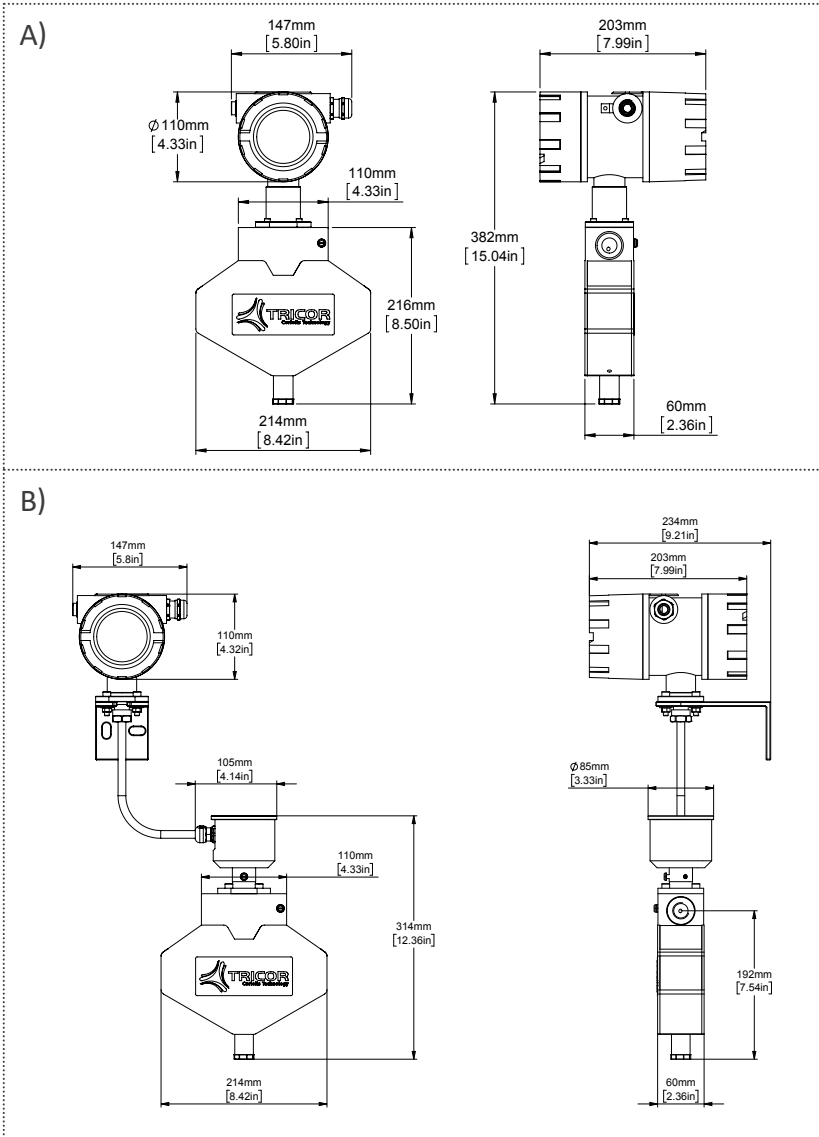

METER DIMENSIONS³⁾ AND WEIGHTS

A) Compact Version

Weight: 7 kg [15.4 lb]

With meter mount in aluminum diecast housing

Process Connection:

G $\frac{1}{2}$ " thread (others on request)

B) Remote Version

Weight: 8.3 kg [18.3 lb]

With junction box and remote field mount

Process Connection:

standard meter connection according table

APPROVALS & CERTIFICATIONS

Hazardous area (Ex)

ATEX Zone 1 IECEX	Compact version: II 2G Ex db ia IIC T4 Gb Remote version⁵⁾: Sensor: II 1G Ex ia IIC T4...T2 Ga Transm.: II 2(1)G Ex db [ia Ga] IIC T4 Gb
Atex Zone 2 cCSAus ⁴⁾	All versions: II 3G Ex nA IIC T4 Compact version: Kl. 1, Div. 1, Gruppe A-D: T4 (US, Can) Ex db ia IIC T4 Gb (Can) Remote version⁵⁾: Sensor: Kl. 1, Div. 1, Gruppe A-D: T4...T2 (US, Can) Ex ia IIC T4...T2 Ga (Can) Transm.: Kl. 1, Div. 1, Gruppe A-D: T4 (US, Can) Ex db [ia Ga] IIC T4 Gb (Can)
EAC (TR-CU)	Compact version: 1Ex d [ia] IIC T4 Remote version⁵⁾: Sensor: 1Ex ia IIC T4...T2 X Transm.: 1Ex d [ia] IIC T4
KGS (Korean)	Compact version: Ex d [ia] IIC T4 Remote version⁵⁾: Sensor: Ex ia IIC T4 Transm.: Ex d [ia] IIC T4

PANEL MOUNT⁶⁾



REMOTE MOUNT⁷⁾



ELECTRONICS

Power Supply: 24 V DC or 100 ... 240 V AC (version dependent)
Outputs: Analog, Frequency, Pulse, Status
Interfaces: RS485 RTU (Modbus), HART®
Cable Gland: M20 | $\frac{1}{2}$ " NPT

www.tricorflow.com

Product Type Approval

American Bureau of Shipping	Certificate Number: 14-HS1223473-PDA-DUP
RMRS	Russian Maritime Register of Shipping

³⁾ Drawing of the Meter Dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

⁴⁾ For cCSAus the electronic is only available in aluminum housing.

⁵⁾ Only wall mounting, not panel mounting.

⁶⁾ Weight: 0.4 kg [0.88 lb].

⁷⁾ Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable, Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].



NORTH & SOUTH AMERICA

AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek WI 53154 | USA
+1 414 574 4300

ASIA PACIFIC & MIDDLE EAST

KEM Küppers Elektromechanik GmbH
73 Science Park Drive
#01-08/09 Cintech 1
Singapore 118254
+65 6797 8577

CHINA

KEM flow technology (Beijing) Co., Ltd.
Rm. 906, Block C, Ruiyu Office Bldg, No. 15
HongJunYingNan Road
Chaoyang District, Beijing 100012 | China
+86 10 84929567


EUROPE (ROW)

KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-100



PROCESS CONNECTION

Model Code	ANSI B16.5 or DIN EN 1092-1 Form B	Face-to-Face (mm)	Flange - ϕ (mm)	Screws QTY	Hole - ϕ for screws (mm) or screw dim.
AA	0.5" CL 150 ANSI	390	90	4	16
AB	0.5" CL 300 ANSI	390	95	4	16
AC	0.5" CL 600 ANSI	390	95	4	16
AD	0.5" CL 900 ANSI	390	120	4	22
AE	1.0" CL 150 ANSI	390	110	4	16
AF	1.0" CL 300 ANSI	390	95	4	19
AG	1.0" CL 600 ANSI	390	125	4	19
AH	1.0" CL 900 ANSI	390	150	4	25
DA	DN15 PN40 EN 1092-1 Form B1	390	95	4	M12
DB	DN15 PN100 EN 1092-1 Form B1	390	105	4	M12
DC	DN25 PN40 EN 1092-1 Form B1	390	115	4	M12
DD	DN25 PN100 EN 1092-1 Form B1	390	140	4	M16

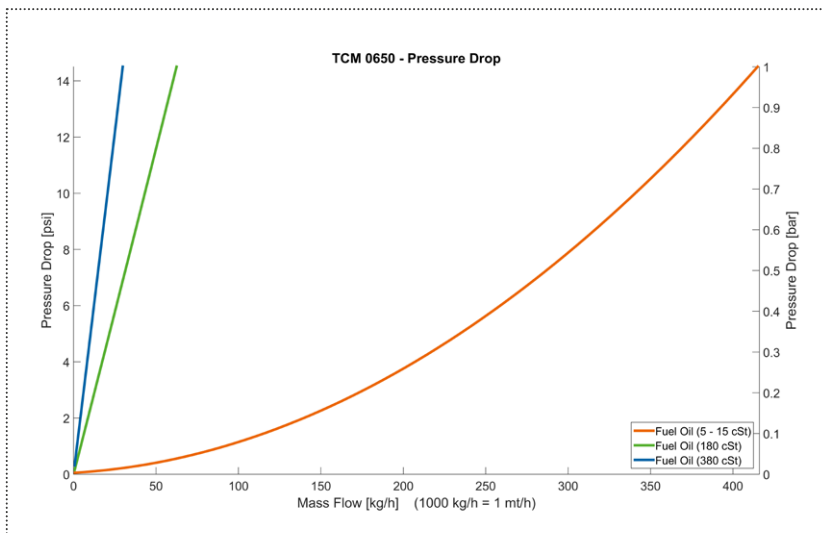

PRESSURE DROP

Range	Fuel Oil		
Viscosity (cSt)	5-15	180	380
Density (kg/m ³)	900	900	900
Flow Rate (mt/h)	0.44	0.06	0.03
Pressure Drop (bar/psi)	1 [14.5]		

www.tricorflow.com



NORTH & SOUTH AMERICA
 AW-Lake Company
 2440 W. Corporate Preserve Dr. #600
 Oak Creek WI 53154 | USA
 +1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
 KEM Küppers Elektromechanik GmbH
 73 Science Park Drive
 #01-08/09 Cintech 1
 Singapore 118254
 +65 6797 8577

CHINA
 KEM flow technology (Beijing) Co., Ltd.
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15
 HongJunYingNan Road
 Chaoyang District, Beijing 100012 | China
 +86 10 84929567

EUROPE (ROW)
 KEM Küppers Elektromechanik GmbH
 Liebigstraße 5
 85757 Karlsfeld | Germany
 +49 8131 59391-100