



## CORIOLIS MASS FLOW AND DENSITY METER FOR MARINE FUEL CONSUMPTION MANAGEMENT

- Customized installation length
- Direct mass flow measurement
- Real time density measurement for fuel quality control
- Maintenance free
- No moving parts
- Replaces all kind of volume based flow meters
- Excellent repeatability in order to determine actions for process/engine optimization
- Recommended 5 year meter recalibration

### ACCURACY<sup>1)</sup>

Basic Accuracy (Mass Flow) <sup>2)</sup> :	±0.3 % (option: up to ±0.1 %) of flow rate
Repeatability (Mass Flow):	±0.05 % of flow rate
Basic Accuracy (Volume Flow) <sup>2)</sup> :	±0.3 % (option: up to ±0.15 %) of flow rate
Repeatability (Volume Flow):	±0.05 % of flow rate
Zero Stability:	±0.01 % of full scale

### DENSITY

Density Range:	up to 2,500 kg/m <sup>3</sup> [2.5 g/cm <sup>3</sup> ]
Density Accuracy <sup>2)</sup> :	±1.0 kg/m <sup>3</sup> [±0.001 g/cm <sup>3</sup> ]
Density Repeatability:	±0.5 kg/m <sup>3</sup> [±0.0005 g/cm <sup>3</sup> ]

### TEMPERATURE

Process Temperature Range:	-40 °C ... +100 °C [-40 °F ... +212 °F] Option: -60 °C ... +200 °C [-76 °F ... +392 °F]
Temperature Accuracy:	±1 °C ±0.5 % of reading [±1.8 °F ±0.5 % of reading]
Temperature Repeatability:	±0.2 °C [±0.36 °F]

### MATERIALS (WETTED PARTS)

Tubes:	1.4404 [AISI 316L]
Case:	1.4404 [AISI 316L]
Flow Splitter:	1.4404 [AISI 316L]
Brazing Alloy:	BNi-2

### TYPICAL SPECIFICATION:


Nominal Meter Size:	DN15 [½"]
---------------------	-----------



<sup>1)</sup> Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.  
<sup>2)</sup> The specifications refer to standard conditions (for further information see TCM CLASSIC series manual).



# CLASSIC Series | TCM 5500 Coriolis Mass Flow Meter

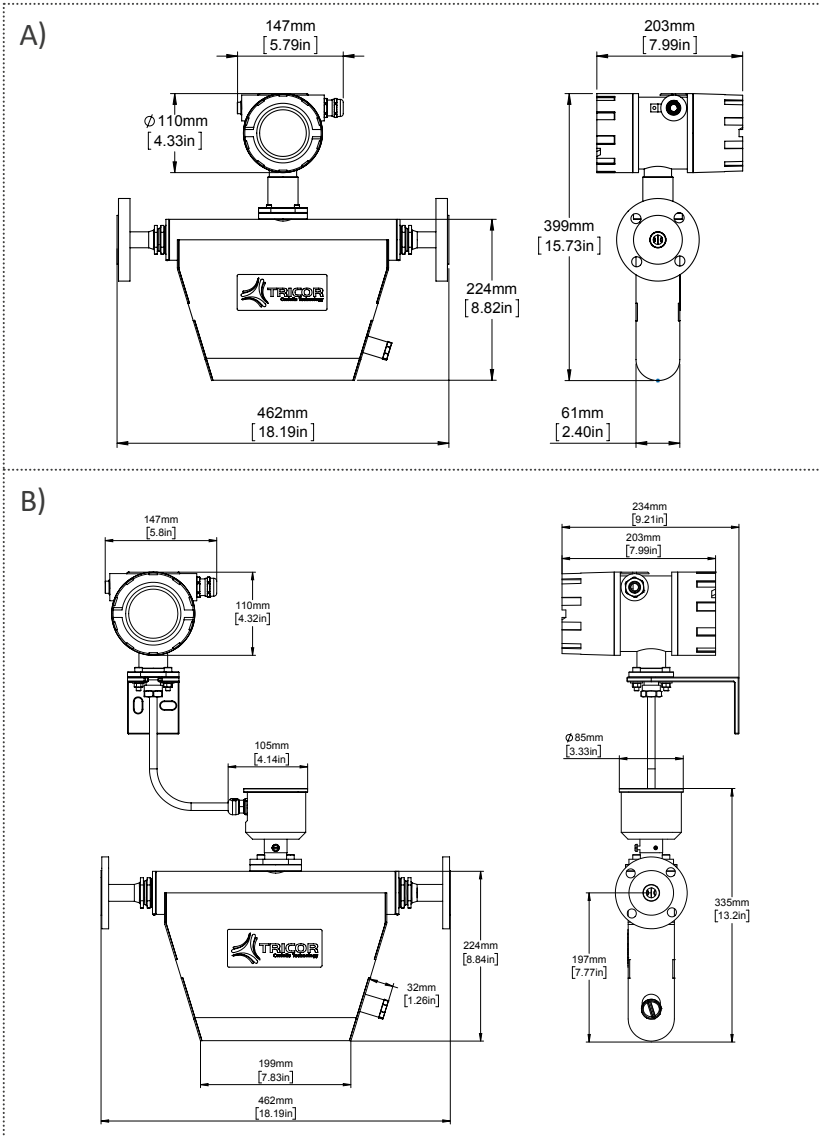

## METER DIMENSIONS<sup>3)</sup> AND WEIGHTS

### A) Compact Version

Weight: 8.5 kg [18.7 lb]

With meter mount in aluminum diecast housing  
Process Connection:  
DIN15 PN40 [½" ANSI CL 300] (others on request)

### B) Remote Version

Weight: 9.8 kg [21.6 lb]

With junction box and remote field mount  
Process Connection:  
standard meter connection according table

## APPROVALS & CERTIFICATIONS

Hazardous area (Ex)

ATEX Zone 1 IECEX	<b>Compact version:</b> II 2G Ex db ia IIC T4 Gb <b>Remote version<sup>6)</sup>:</b> Sensor: II 1G Ex ia IIC T4...T2 Ga Transm.: II 2(1)G Ex db [ia Ga] IIC T4 Gb
Atex Zone 2 cCSAus <sup>5)</sup>	<b>All versions:</b> II 3G Ex nA IIC T4 <b>Compact version:</b> Cl. 1, Div. 1, Group A-D: T4 (US, Can) Ex db ia IIC T4 Gb (Can) <b>Remote version<sup>6)</sup>:</b> Sensor: Cl. 1, Div. 1, Group A-D: T4...T2 (US, Can) Ex ia IIC T4...T2 Ga (Can) Transm.: Cl. 1, Div. 1, Group A-D: T4 (US, Can) Ex db [ia Ga] IIC T4 Gb (Can)
EAC (TR-CU)	<b>Compact version:</b> 1Ex d ia IIC T4 Gb X <b>Remote version<sup>6)</sup>:</b> Sensor: 0Ex ia IIC T4...T2 Ga X Transm.: 1Ex d [ia Ga] IIC T4 Gb X
KGS (Korean)	<b>Compact version:</b> Ex d [ia] IIC T4 <b>Remote version<sup>6)</sup>:</b> Sensor: Ex ia IIC T4 Transm.: Ex d [ia] IIC T4

## PANEL MOUNT<sup>6)</sup>



## REMOTE MOUNT<sup>7)</sup>



## ELECTRONICS

Power Supply: 24 V DC or 100 ... 240 V AC (version dependent)  
Outputs: Analog, Frequency, Pulse, Status  
Interfaces: RS485 RTU (Modbus), HART®  
Cable Gland: M20 | ½" NPT

[www.tricorflow.com](http://www.tricorflow.com)

## Product Type Approval

American Bureau of Shipping	Certificate Number: 14-HS1223473-PDA-DUP
RMRS	Russian Maritime Register of Shipping

<sup>3)</sup> Drawing of the Meter Dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

<sup>4)</sup> For cCSAus the electronic is only available in aluminum housing.

<sup>5)</sup> Only wall mounting, not panel mounting.

<sup>6)</sup> Weight: 0.4 kg [0.88 lb].

<sup>7)</sup> Weight with aluminum diecast housing: 3.8 kg [8.4 lb] with 3 m cable, Weight with 1.4404 [AISI 316L] housing: 6.15 kg [13.56 lb].

### NORTH & SOUTH AMERICA

AW-Lake Company  
2440 W. Corporate Preserve Dr. #600  
Oak Creek WI 53154 | USA  
+1 414 574 4300

### ASIA PACIFIC & MIDDLE EAST

KEM Küppers Elektromechnik GmbH  
Liebigstraße 5  
85757 Karlsfeld | Germany  
+49 8131 59391-0

### CHINA

KEM flow technology (Beijing) Co., Ltd.  
Rm. 906, Block C, Ruiipu Office Bldg, No. 15  
HongJunYingNan Road  
Chaoyang District, Beijing 100012 | China  
+86 10 84929567




### EUROPE (ROW)

KEM Küppers Elektromechnik GmbH  
Liebigstraße 5  
85757 Karlsfeld | Germany  
+49 8131 59391-100



## PROCESS CONNECTION

Model Code	ANSI B16.5 or DIN EN 1092-1 Form B	Face-to-Face (mm)	Flange - $\phi$ (mm)	Screws QTY	Hole - $\phi$ for screws (mm) or screw dim.
AA	0.5" CL 150 ANSI	460	90	4	16
AB	0.5" CL 300 ANSI	460	95	4	16
AC	0.5" CL 600 ANSI	460	95	4	16
AD	0.5" CL 900 ANSI	460	120	4	22
AE	1.0" CL 150 ANSI	460	110	4	16
AF	1.0" CL 300 ANSI	460	95	4	19
AG	1.0" CL 600 ANSI	460	125	4	19
DA	DN15 PN40 EN 1092-1 Form B1	460	95	4	M12
DB	DN15 PN100 EN 1092-1 Form B1	460	105	4	M12
DC	DN25 PN40 EN 1092-1 Form B1	460	115	4	M12
DD	DN25 PN100 EN 1092-1 Form B1	460	140	4	M16
DE	DN40 PN40 EN 1092-1 Form B1	460	150	4	M16

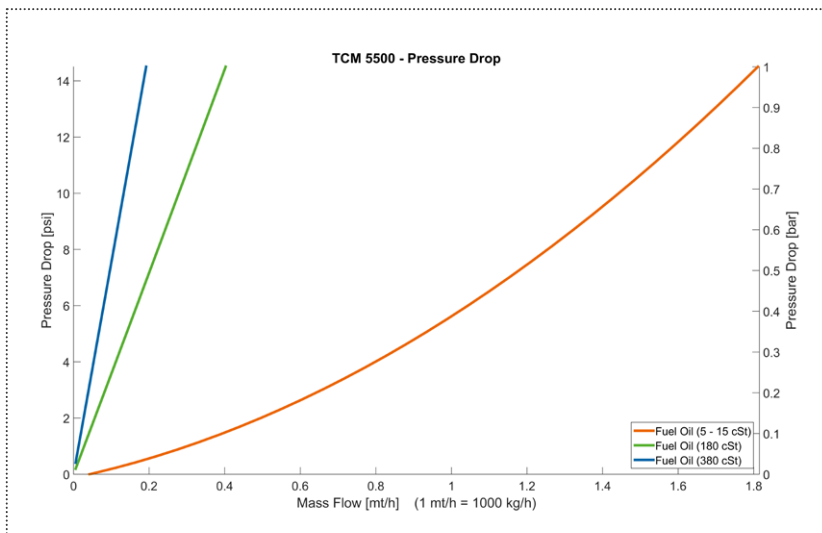

## PRESSURE DROP

Range	Fuel Oil		
Viscosity (cSt)	5-15	180	380
Density (kg/m <sup>3</sup> )	900	900	900
Flow Rate (mt/h)	1.9	0.41	0.20
Pressure Drop (bar/psi)	1 [14.5]		

[www.tricorflow.com](http://www.tricorflow.com)



**NORTH & SOUTH AMERICA**  
 AW-Lake Company  
 2440 W. Corporate Preserve Dr. #600  
 Oak Creek WI 53154 | USA  
 +1 414 574 4300

**ASIA PACIFIC & MIDDLE EAST**  
 KEM Küppers Elektromechanik GmbH  
 Liebigstraße 5  
 85757 Karlsfeld | Germany  
 +49 8131 59391-0

**CHINA**  
 KEM flow technology (Beijing) Co., Ltd.  
 Rm. 906, Block C, Ruiipu Office Bldg, No. 15  
 HongJunYingNan Road  
 Chaoyang District, Beijing 100012 | China  
 +86 10 84929567

**EUROPE (ROW)**  
 KEM Küppers Elektromechanik GmbH  
 Liebigstraße 5  
 85757 Karlsfeld | Germany  
 +49 8131 59391-100