



FEATURES

- Easy interface & factory pre-configured
- Programmable control inputs and outputs
- Different approvals

BENEFITS

- ▶ Works out of the box, reduce installation cost
- ▶ Transmits flow rate, total, density or temperature
- ▶ Use in nearly all plant environments

SPECIFICATIONS

Display:	back-lit LCD screen 132 x 32 dot Programmed via front keyboard or TRICOR configurator
Supply Voltage:	24 V DC
Power Consumption:	4 W
Interfaces:	RS485 (Modbus RTU)
Housing Material:	Noryl
Protection Class:	front: IP50 rear: IP30



ANALOG OUTPUT

Current Outputs (2x):	4 ... 20 mA passive
Output Value (programmable):	flow, total mass, total volume, density, temperature

PULSE OUTPUT

Frequency Range:	0.5 - 10,000 Hz
Output Signal:	active push-pull output for flow rate

STATUS IN- AND OUTPUT

Status Output:	push pull programmable in TOTAL mode: 0.5 - 100 Hz in FREQUENCY mode: 0.5 - 10,000 Hz
Control Input:	programmable

ANALOG INPUT (OPTION)

Input Type:	4 ... 20 mA active for two-wire passive pressure sensor
-------------	--


TEMPERATURE

Ambient Temperature (DC):	±0 °C ... +60 °C [-32 °F ... +140 °F]
Storage and Transport:	-20 °C ... +70 °C [-4 °F ... +158 °F]

CONNECTIVITY

Electrical Connections:	cage clamp terminals
Sensor connector:	D-SUB, 9-pin, female thread

Original KEM/AWL document:TCE_8000_PanelMount_CLASSIC_F_EN_180720_E008 | Copyright KEM/AWL, Subject to change without notice

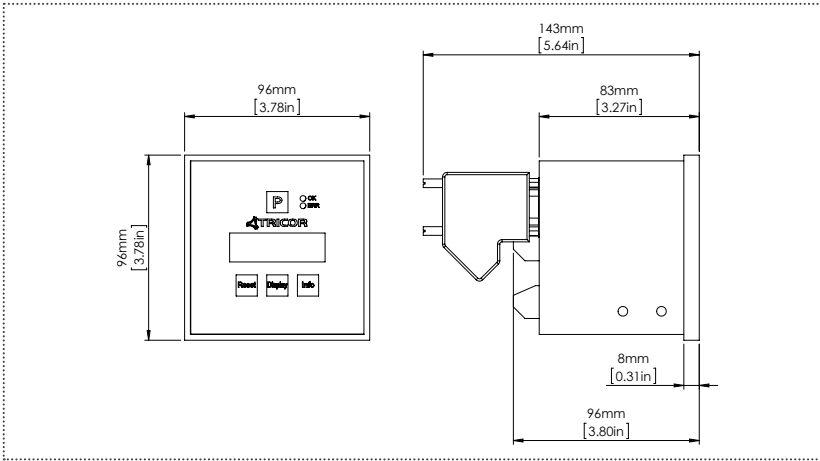

METER DIMENSIONS AND WEIGHTS

Standard Version
Weight: 0.4 kg [0.88 lb]

APPROVALS & CERTIFICATIONS

EMC

EN 61000-6-4

EN 61000-6-2

Original KEM/AWL document:TCE_8000_PanelMount_CLASSIC_F_EN_180720_E008 | Copyright KEM/AWL, Subject to change without notice

www.tricorflow.com



NORTH & SOUTH AMERICA
AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek WI 53154 | USA
+1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
KEM Küppers Elektromechanik GmbH
73 Science Park Drive
#01-08/09 Cintech 1
Singapore 118254
+65 6797 8577

CHINA
KEM flow technology (Beijing) Co., Ltd.
Rm. 906, Block C, Ruiipu Office Bldg, No. 15
HongJunYingNan Road
Chaoyang District, Beijing 100012 | China
+86 10 84929567

EUROPE (ROW)
KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-100