



PRO Series | TCMP 7900 Coriolis Mass Flow Meter

FEATURES

- Robust, no moving parts
- Customized installation length
- Excellent repeatability (better than $\pm 0.05\%$), accuracy ($\pm 0.1\%$)
- Advanced transmitter technology
Upgrade/modernize in place

BENEFITS

- ▶ Increased productivity
- ▶ Considerable cost savings for installation
- ▶ Increased product quality
- ▶ Optimized lifecycle management

FLOW RATE

Mass Flow Rate (max.):	7,900 kg/h [290 lb/min]
Volumetric Flow Rate (max.):	7,900 l/h [34.78 gpm, 1,193 oil bbl/d (US)]
Nominal Meter Size:	DN15 [$\frac{1}{2}$ "]

PRESSURE RATING

100 bar [1,450 psi]

ACCURACY (LIQUIDS)¹⁾

Basic Accuracy (Mass Flow):	$\pm 0.1\%$ of flow rate
Repeatability (Mass Flow):	better than $\pm 0.05\%$ of flow rate
Basic Accuracy (Volume Flow):	$\pm 0.15\%$ of flow rate
Repeatability (Volume Flow):	better than $\pm 0.05\%$ of flow rate
Zero Stability:	$\pm 0.01\%$ of full scale

ACCURACY (GASES)

Basic Accuracy (Mass Flow):	$\pm 0.5\%$ of flow rate
Repeatability (Mass Flow):	$\pm 0.25\%$ of flow rate

DENSITY


Density Range:	up to 2,500 kg/m ³ [2.5 g/cm ³]
Density Accuracy ²⁾ :	± 1.0 kg/m ³ [± 0.001 g/cm ³]
Density Repeatability:	± 0.5 kg/m ³ [± 0.0005 g/cm ³]

TEMPERATURE

Process Temperature Range:	-60 °C ... +200 °C [-76 °F ... +392 °F]
Temperature Accuracy:	± 1 °C $\pm 0.5\%$ of reading [± 1.8 °F $\pm 0.5\%$ of reading]
Temperature Repeatability:	± 0.2 °C [± 0.36 °F]

MATERIALS (WETTED PARTS)


Tubes:	1.4404 [AISI 316L]
Case:	1.4404 [AISI 316L]
Flow Splitter:	1.4404 [AISI 316L]
Brazing Alloy:	BNi-2

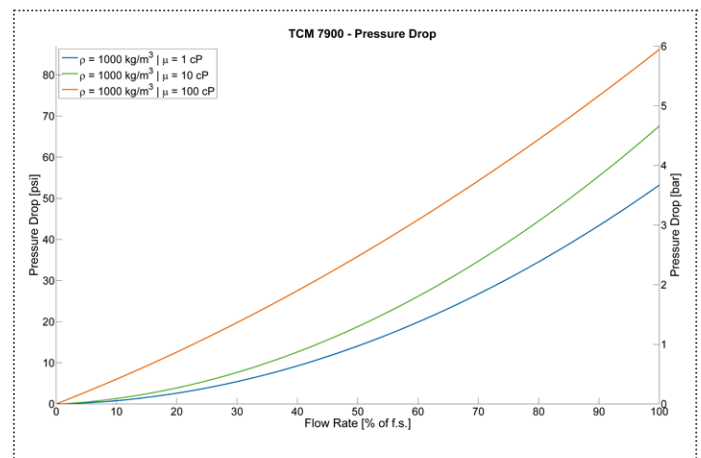

¹⁾ Stated flow accuracy combines the effects of repeatability, linearity and hysteresis.
²⁾ The specifications refer to standard conditions (for further information see TCMP PRO series manual).



PRO Series | TCMP 7900 Coriolis Mass Flow Meter

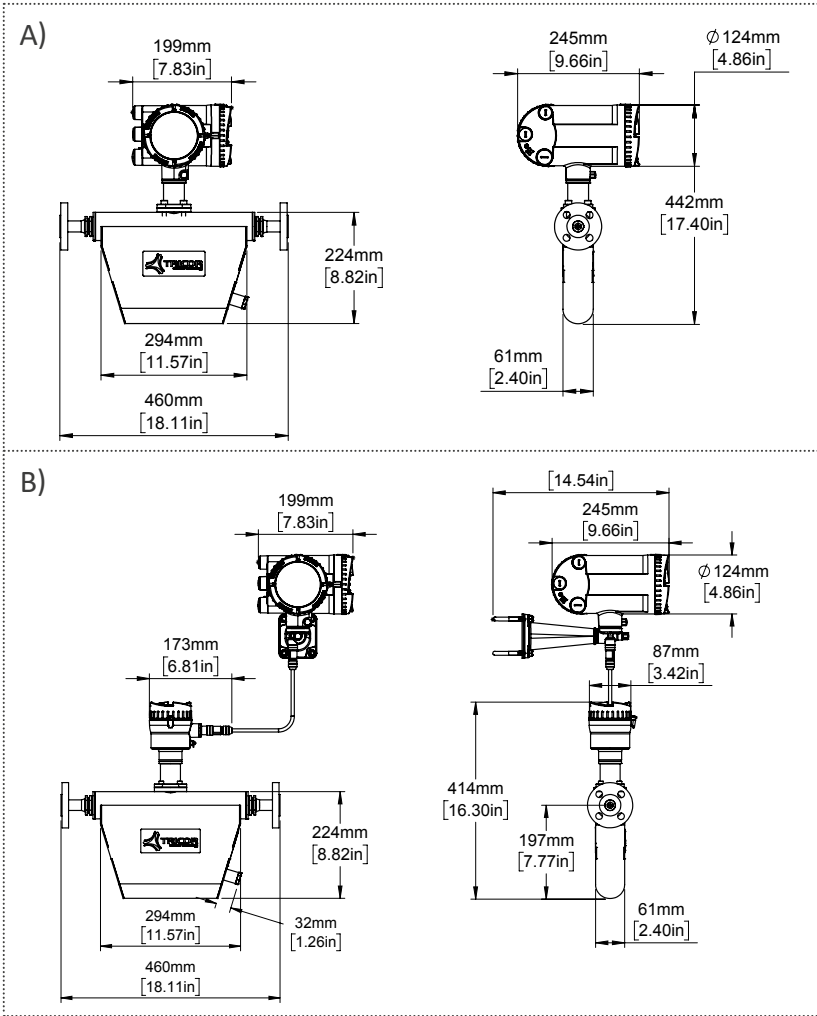

METER DIMENSIONS³⁾ AND WEIGHTS

A) Compact Version

Weight: 10.0 kg [22.0 lb]

With meter mount in aluminum diecast housing

B) Remote Version

Weight: 12.5 kg [27.6 lb]

With junction box and remote field mount

Standard Process Connection

DN15 PN40 [½" ANSI CL 300] (others on request)

EX-CERTIFICATIONS⁴⁾

ATEX	Zone 1:	Ex db ia [ia Ga] IIC T* Gb
	Zone 2:	II 3G nR nA IIC T4
IECEX		Ex db ia [ia Ga] IIC T* Gb
cCSAus	Canadian Marking:	Ex db ia [ia Ga] IIC T* Gb
	US Zones Marking:	Cl. 1, Zone 1 AEx db ia [ia Ga] IIC T4-T3 Gb
	US Divisions Marking:	Cl. 1, Div. 1 Groups A, B, C and D, T*

BASIC TRANSMITTER⁵⁾



REMOTE MOUNT



COMPACT MOUNT



DISPLAY ELECTRONICS

Power Supply:	20 ... 27 V DC 100 ... 240 V AC
Graphical Display:	240 x 160 pixels
Configurable I/O:	Analog, Digital, Frequency, Relay
Interfaces:	PROFIBUS PA, PROFIBUS DP, HART 7.5, Modbus RTU
Enclosure Material:	Aluminum
Cable Gland:	½" NPT

³⁾ Drawing of the meter dimensions reflects one standard connection, other connections on request (Installation length can vary depending on selected connection).

⁴⁾ T* refer to Ex-certificate.

⁵⁾ Specification basic transmitter: see special TCD 9010 spec sheet.

www.tricorflow.com



NORTH & SOUTH AMERICA
AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek WI 53154 | USA
+1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-0

CHINA
KEM flow technology (Beijing) Co., Ltd.
Rm. 906, Block C, Ruiipu Office Bldg, No. 15
HongJunYingNan Road
Chaoyang District, Beijing 100012 | China
+86 10 84929567

EUROPE (ROW)
KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-100